
LED Video Dance Floor

Type NO.:FLOORV10

Excellent Quality Satisfactory Price Best After-sales



Feature:

1. component : Main control card , Receiving Hub card, Software, LAN cable. Computer, etc
2. Adopted 5050 SMD 3IN1 LED to be light source, pitch: 10mm
3. Slim design, aluminum alloy housing, half transparent acrylic cover. Can stress 500kg/pcs.
4. Can display various lighting effects, words, graphic, flash and video.
5. Offer pitch 25mm and 50mm, according to your different demand
6. Outdoor and indoor using, protection level reach IP65, such as nightclubs, bars, multi-function hall, stage, T stage show, auto shows, etc

Main component



Module



Main control card



Receiving Hub card

Working




Independent graphics card





Computer



Main control card (Installed PC)

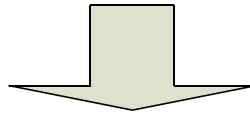

Receiving Hub card (Installed in the first line LED video dance floor)

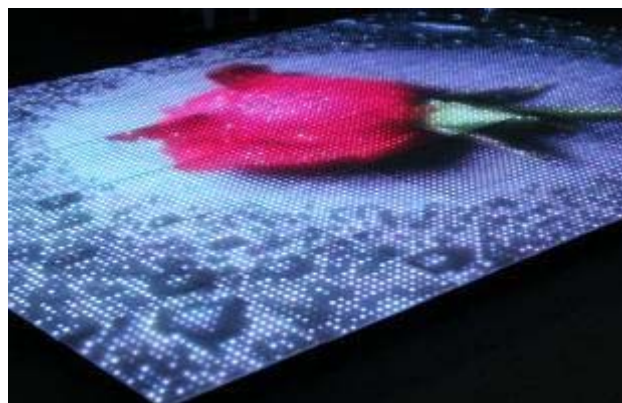


Led video dance floor

Control Diagram:

AC110-240V Input

3 pins waterproof power cable

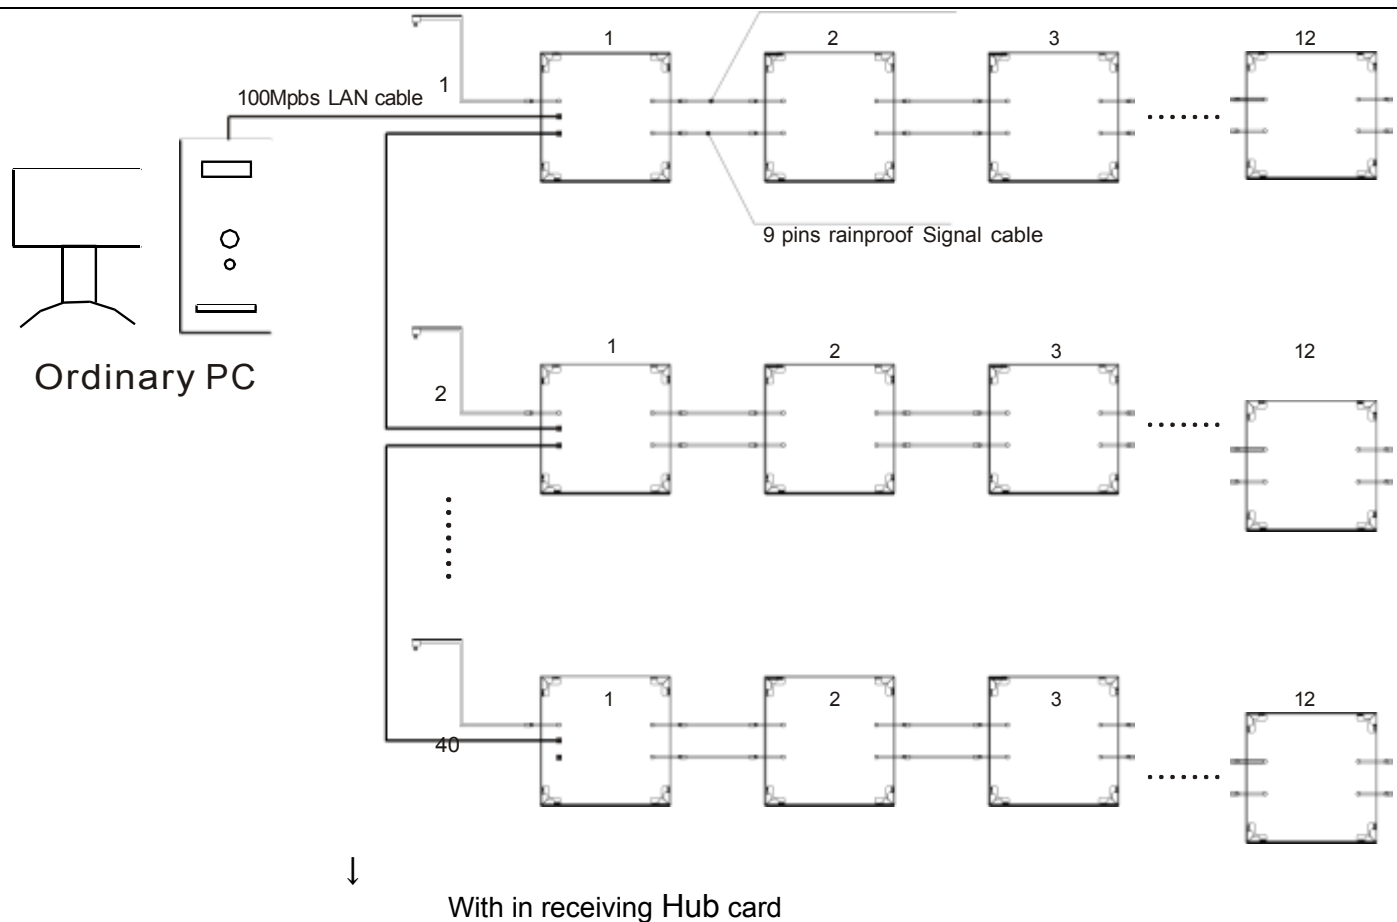

Specification:


Type Number	FLOORV10
Dimension (mm)	L960*W960*H150
Quantity (pcs/ unit)	10000
Light resource	5050 SMD 3 in 1
Max.power consumption	480 W/m ²
Input voltage	AC180~240 V
Display color	Full color RGB
Protection Level	IP65
Net Weight	42 KG
Crust Material	Acrylic
Fixture housing	Aluminum alloy
Beam angle	110~140
Life span	50,000 hours
Working humidity	≤95%
Isolating Grade	CLASSE II
Light transmittance	≤98%
Control mode	LED FLASH Computer Control System/DMX512 Controller

what is “no gap connection design”?


Answer: No Gap design , compared to many traditional dance floor design , which have metal frame , it is more perfect and even for connection. Pls check the compared pictures following:



Details pictures:

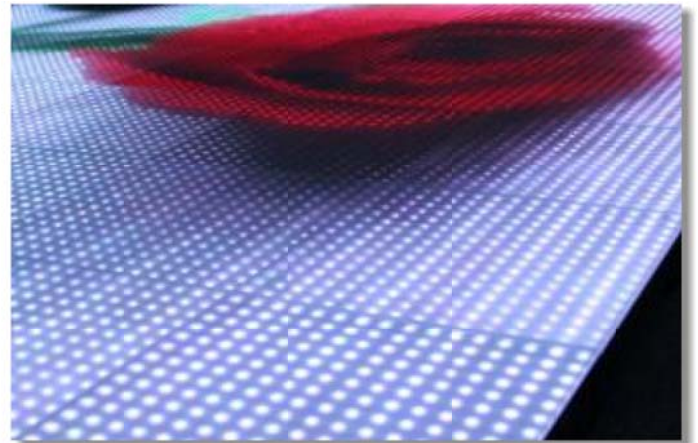

Testing pictures:

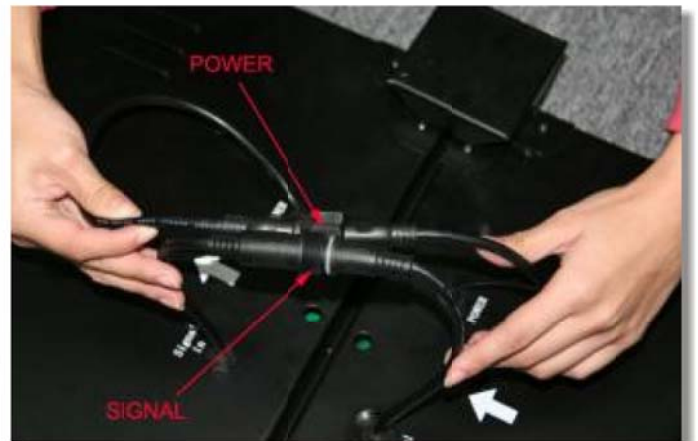

Protection level Ip65



Maximum stress weight:500KG

2011/03/28 15:52



Wonderful effect!

